Home Care Technical Specification

Handheld Shower with palm-fit design

DN8010

Stock Numbers:

 DN8010 – Handheld Shower with palm-fit design
Glacier Finish

Materials:


Handheld Shower is made of ABS Plastic and Santoprene.

Flow Rate of 2.5 gpm

ASSEMBLY TESTED TO CONFIRM ADA COMPLIANCE



Dimensions:

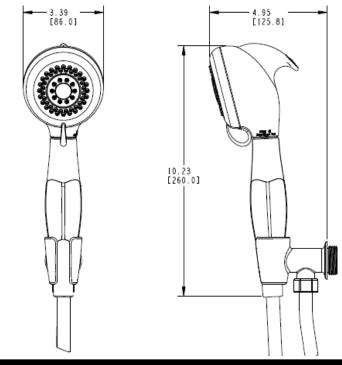

Installation Instructions:

- 1. Remove the existing cradle or showerhead from the wall by unscrewing (counter clockwise) the product from the end of the shower arm.
- Cover the thread of the pipe coming out of the wall with thread seal tape (included).
- 3. Screw the Handheld Shower with palm-fit design shower cradle on to the pipe (shower arm) coming out of the wall.
- 4. Identify the end of the hose with the black washer inside the plastic nut and screw the hose onto the bottom of the cradle.
- 5. Screw handheld shower onto the other end of the hose.
- 6. Rest the handheld shower in the cradle.

	0 . 0
(reative	Specialties®
a Division	of MOEN

Buy it for looks. Buy it for life.

Stock Number:_____ Hand Held Shower By Creative Specialties

25300 AL MOEN DRIVE • NORTH OLMSTED, OH 44070 CORPORATE HEADQUARTERS: (800) 321-8809 • FAX: (800) 848-6636 INTERNATIONAL: (440) 962-2000 • FAX: (440) 962-2726 CUSTOMER SERVICE (USA): 800-882-0116 • FAX: (888) 379-2720 WWW.MOEN.COM